


## Electr. Digital Caliper

**NEW**

DIN 862

- with metal housing and metal buttons
- standard model for larger measuring range
- with data output (mini USB)

- sturdy quality, stainless steel, hardened
- large LCD display with clear reading, 9 mm digit height
- jaws finely ground and lapped, with fixing screw and fine adjustment
- On/Off button, with ABS/INC measuring system
- mm/inch switchable, zero setting at any position
- incl. 1x 3 V battery (type CR2032, art.-no.: 90112), with operation manual

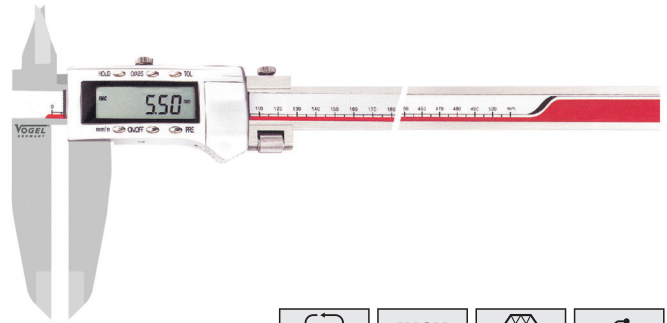

### Option

- data transfer via cable, art.-no. 209001, see page 334

ART NO	mm / inch	mm / inch	mm	mm	mm	mm	CC
202065	400 / 16	0.01 / 0.0005	0.01	0.05	100	45	on request
202066	500 / 20	0.01 / 0.0005	0.01	0.05	100	45	on request
202067	600 / 24	0.01 / 0.0005	0.01	0.05	100	45	on request
202068	800 / 32	0.01 / 0.0005	0.01	0.06	125	60	on request
202069	1000 / 40	0.01 / 0.0005	0.01	0.07	125	60	on request


## Electr. Digital Caliper

**NEW**

DIN 862

- for left hand use

- stainless, hardened
- large LCD display with clear reading, 10 mm digit height
- jaws finely ground and lapped
- On/Off button, with flat depth gauge
- mm/inch switchable, zero setting at any position
- incl. 1x 1.5 V battery (type LR 44, art.-no.: 90213), with operating manual



### Option

- data transfer via cable, art.-no.: 209001 see page 334

ART NO	mm / inch	mm / inch	mm	mm	mm	mm	
202037	150 / 6	0.01 / 0.0005	0.01	0.03	40	16.5	flat
202038	200 / 8	0.01 / 0.0005	0.01	0.03	50	19.5	flat

## Electr. Digital Caliper

**NEW**

DIN 862

- made of carbon fiberglass, non-conductive and especially made for electronic and sensitive purposes, like food sector and automotive parts

- large LCD display with clear reading, 13 mm digit height
- autom. On/Off
- mm/inch switchable, zero setting at any position
- art.-no. 202202 without depth gauge, made of carbon fiberglass
- art.-no. 202203 with flat depth gauge, made of carbon fiberglass
- incl. 1x 1,5 V battery (type LR44, art.-no.: 90213), with operation manual



ART NO	mm / inch	mm / inch	mm	mm	mm	mm	
202202	100 / 4	0.01 / 0.0005	0.01	0.02	30	12	—
202203	150 / 6	0.01 / 0.0005	0.01	0.02	40	16	flat