



Precision Digital Micrometers

Electr. Digital Micrometer

DIN 863

- large LCD display with clear reading, digit height 7 mm
- frame lacquered, with insulation plates
- carbide surfaces, lapped, spindle hardened and ground
- autom. shutdown, zero setting at any position
- mm/inch switchable, without data output
- locking wheel for quick and precise fixing
- with ratchet for constant measuring pressure
- incl. 1x 1.5 V battery (type LR44, art.-no.: 90213), with operation manual
- from up 25 mm with setting gauge

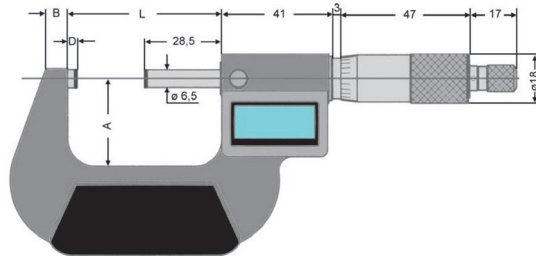


ART NO	mm / inch	mm / inch	ø mm	mm	A mm	B mm	D mm	L mm	max. mm	CC
231088	0 – 25 / 0 – 1	0.001 / 0.00005	18	0.5	24	6	3	32	0.002	on request
231089	25 – 50 / 1 – 2	0.001 / 0.00005	18	0.5	32	8	3	57	0.002	on request
231090	50 – 75 / 2 – 3	0.001 / 0.00005	18	0.5	45	8	3	82	0.003	on request

Electr. Digital Micrometer • IP40

DIN 863

- dust resistant acc. to DIN 40050 / IEC 60529
- Absolute Measurement System (ABS-system)
- frame lacquered, with insulation plates, sturdy quality
- large LCD display, clear reading, digit height 8 mm
- with carbide surfaces, lapped, spindle hardened and ground
- On/Off button, zero setting at any position
- mm/inch switchable, ABS/INC measuring system
- locking lever for quick and precise fixing
- with friction ratchet for constant measuring pressure
- friction ratchet with rubber studs for better handling
- incl. 1x 3 V battery (type CR2032, art.-no. 90112), with operation manual
- from up 25 mm with setting gauge

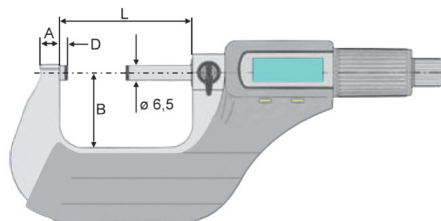

ergonomically designed handle shape



ART NO	mm / inch	mm / inch	ø mm	mm	A mm	B mm	D mm	L mm	max. mm	CC
231061	0 – 25 / 0 – 1	0.001 / 0.00005	22	0.5	6	25	3.5	32	0.003	on request
231062	25 – 50 / 1 – 2	0.001 / 0.00005	22	0.5	6	32	3.5	57	0.003	on request
231063	50 – 75 / 2 – 3	0.001 / 0.00005	22	0.5	7	44	3.5	82	0.004	on request
231064	75 – 100 / 3 – 4	0.001 / 0.00005	22	0.5	8	59	3.5	108	0.005	on request