

Protractors and Marking Gauges

Electr. Digital Bevel Protractor

- for high precision accuracy and safety reading

- LCD display with clear reading, digit height 10 mm
- stainless, hardened and fine ground
- On/Off button, with fixing screw
- zero setting at any position, with data hold function
- reading of values in display by 180° switchable
- incl. 1x 3 V battery (type CR2032, art.-no.: 90112), with operation manual




ART No	length of blade mm	arc-ø mm				
320201	150	120	0 – 180	0.05	0.3	on request
320202	200	150	0 – 180	0.05	0.3	on request
320203	300	200	0 – 180	0.05	0.3	on request

Protractor (Skew Measure)

- for high precision accuracy and safety reading

- LCD display with clear reading, digit height 10 mm
- stainless, hardened and fine ground
- On/Off button, with fixing screw
- zero setting at any position, with data hold function
- reading of the values in the display from 10° – 170°
- incl. 1x 3 V battery (type CR2032, art.-no.: 90112), with operation manual

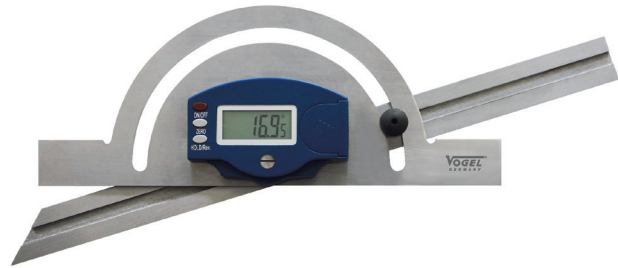


ART No	length of blade mm	arc-ø mm	angle graduation	
320581	150	100	10 – 170	on request
320582	300	150	10 – 170	on request
320583	400	200	10 – 170	on request

Marking Gauge

- with flat sliding ruler and marking block
- with fixing screw

- made of Dur-Aluminium, surface hardened HRC63
- scratch-resistant, black anodized surface
- marking block made of steel
- laser engraved, clear reading scale
- vernier reading 0.05 mm



ART No			
336230	200	0.05	298 x 60 x 16
336231	250	0.05	348 x 60 x 16
336233	300	0.05	400 x 60 x 16