

# Dial Caliper Gauges

## Kroepelin • Electr. Digital Quicktest • IP67


with  $\mu\text{m}$  resolution and inductive charging technology

- Quicktest in smallest design, also suitable for tablet PCs and smartphones, no additional software required
- large data logger (100 measuring values)
- available with Bluetooth® interface (up to 8 gauges simultaneously) or USB- and Digimatic interface

- water and oil-tight version
- optimal readability with 250° analog display area
- with movable probe arm
- Absolute and Relative measurement program, measuring programs MIN / MAX / HOLD
- adjustable tolerance ranges
- LiPo battery with inductive charging technology, no battery change required
- numerical increment 0.001 / 0.002 / 0.005 / 0.01 mm
- switchable mm/inch




wireless charging pad with power supply



measuring contact points can be changed against additional charge



### INTERFACE

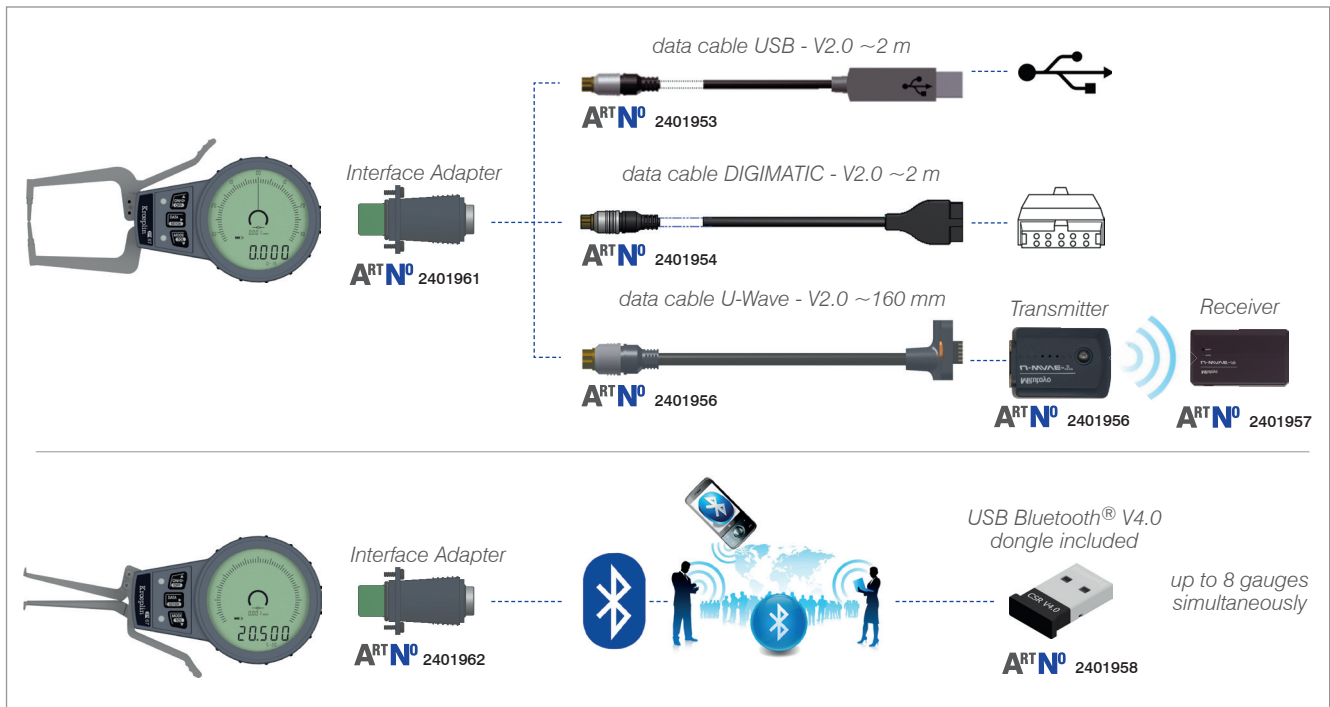

ART No	mm	mm	form K (bullet) S (blade)	L mm	Hb mm	Hf mm	F min. N	F max. N	max. mm	CC
<b>external quicktest gauge</b>										
240550	0 – 15	0.001	K $\varnothing$ 1.5 mm	45	17	17	1.3	1.5	0.010	inclusive
240551	0 – 15	0.001	S R 0.4 mm	45	12	12	1.3	1.5	0.015	inclusive
<b>internal quicktest gauge</b>										
240555	2.5 – 12.5	0.001	S R 0.12 mm	12	0.9	0.9	0.8	1.3	0.010	inclusive
240556	5 – 20	0.001	K $\varnothing$ 0.6 mm	44	2.2	2.2	0.8	1.3	0.010	inclusive
240557	10 – 25	0.001	K $\varnothing$ 1.0 mm	46	4.4	4.4	0.8	1.3	0.010	inclusive