



Precision Micrometer and Sets

External Micrometer

DIN 863

- for standard expectations

- drum and sleeve matt chrome finish
- frame hammer blow grey lacquered, with insulated handle
- carbide surfaces, lapped, spindle hardened and ground
- locking lever for quick and precise fixing
- with ratchet for constant measuring pressure
- from up 25 mm with setting gauge

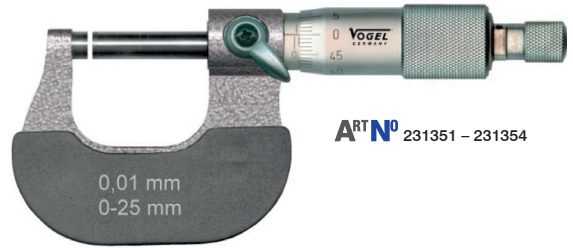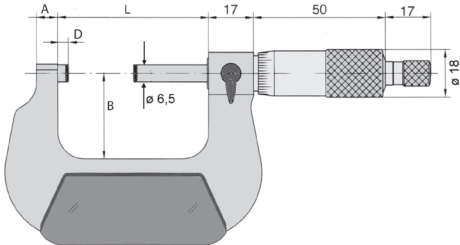

ART N°	mm	mm	ø mm	mm	A mm	B mm	D mm	L mm	max. mm	CC
231351	0 – 25	0.01	18	0.5	6	24	3.0	32	0.004	on request
231352	25 – 50	0.01	18	0.5	8	32	3.0	57	0.004	on request
231353	50 – 75	0.01	18	0.5	8	45	3.0	82	0.005	on request
231354	75 – 100	0.01	18	0.5	8	57	3.0	107	0.005	on request
231355	100 – 125	0.01	18	0.5	8	70	3.0	133	0.006	on request
231356	125 – 150	0.01	18	0.5	8	82	3.0	158	0.006	on request
231357	150 – 175	0.01	18	0.5	8	95	5.5	183	0.007	on request
231358	175 – 200	0.01	18	0.5	8	107	5.5	209	0.007	on request

External Micrometer Set

DIN 863

- for standard expectations

- drum and sleeve matt chrome finish
- frame hammer blow grey lacquered, with insulation plates
- carbide surfaces, lapped, spindle hardened and ground
- locking lever for quick and precise fixing
- with ratchet for constant measuring pressure
- from up 25 mm with setting gauge

ART N° 232006



ART N° 232003 - 232004



ART N°	mm	mm	set content	ø mm	mm	spindle-ø mm	CC
232003	0 – 75	0.01	3	18	0.5	6.5	on request
232004	0 – 100	0.01	4	18	0.5	6.5	on request
232006	0 – 150	0.01	6	18	0.5	6.5	on request
232107	150 – 300	0.01	6	18	0.5	6.5	on request
232108	0 – 300	0.01	12	18	0.5	6.5	on request
232109	100 – 200	0.01	4	18	0.5	6.5	on request